



Compressed Air Energy Saving Solutions

Smart Measurement Technology That You Can Trust



For More Info



About Us

At WiseAir Technologies, our mission is to empower industries with innovative and advanced measurement solutions for compressed air and gases. With over 20 years of expertise in the field of compressed air management, we have developed smart, reliable, and state-of-the-art products that are both accurate and easy to use. Our focus is on incorporating cutting-edge technologies like M2M communication and the Industrial Internet of Things (IIoT) to bring increased automation, improved communication, and self-monitoring to industrial processes.

Our WA range of smart IIoT sensors can be easily integrated into existing manufacturing and energy management software to enhance data collection, exchange, and analysis for improved productivity and efficiency.

For measurement of Flow.

Power, Dew Point and Pressure

Our Network

Our Smart Sensors are Developed with Design and Technology Support from Our Partners Across North America, Europe and Asia. With Our Strong Network of Partners, we offer Seamless and Best-in-Class Service to Our Customers.



Product Specialists with Decades of Experience in Compressed Air Measurement and Management

Our software are programmed to analysis and self Diagnose the Measured Datas

Artificial Intelligence and

Machine Learning Software



Compressed Air Systems are Dynamic and Highly In-Efficient. Hence they Require Continuous Monitoring for Sustained Benefits. With Our WiseAir 4.0 Smart Sensors and M2M / AI Softwares Your Compressed Air System is Measured, Analysed and Improved Over Time.

With Our Seamless and Detailed Analytical Reports You Can Keep Track Of Your Compressed Air Systems Efficiency with Minimal Human Intervention.

Our Services

We Offer Free Assessment Services to Identify the HotSpots For Improvements and Develop Road Maps for Sustainable Results. Our Product Specialists Can Also Offer You Customised Plans for Monitoring the Key Performance Factors Of Your Compressed Air System.

Connect with Our Expert Product Specialists to Learn How Your Factory Can Begin to Realize Energy and Cost Savings with Our Advanced Solutions.

Email Us


Understand The True Costs Of Compressed Air

In a Compressor's Life Cycle More than 80 % of its Operating Costs is Spent Towards its Energy. Hence Monitoring and Managing Compressors at their Peak Energy Efficiency will give Significant Energy Savings.

Our Smart Sensors Can Provide Vital Informations Like Flow, Power, Dew Point and Pressure. When Our Sensors are Networked with Our AI Software Programs, All the Measured Datas are Analysed and Reported To You With Suggested Action Plans in Real Time.

Manage Your Compressed Air System Efficiently and Effortlessly With Our WiseAir Smart Sensors and AI Softwares.

Energy Costs



Maintenance Costs

10%

Asia : +91 90477 78715 Europe: +45 36 99 04 22

Asia : info@wiseair.asia Europe : info@wiseair.asia

Call Us





Full Digital Signal Processing for Higher Precision and Better Stability

- Key Features :
 - Thermal Mass Flow, Independent of Temperature and Pressure Change, Integrated Temperature Measurement.
 - Ultra-Wide 1:2500 Turndown Ratio, Measurement Range from 0.1 Nm/s to 250 Nm/s.
 - Full Electrical Isolation thoroughly Filter out Disturbance 2.8" Ultra-Wide Viewing Angle LCD with Capacitive Touch.
 - No Moving Parts, Low Pressure Drop.
 - Optional Data Logging, 10,000,000 Recording Points.
 - With Bluetooth Function for Wireless Sensor Configuration and Data Transmission.
 - Standard RS485 Modbus RTU Interface and 4-20mA current / pulse Output.
 - Suitable for DN20 to DN1000, can be Installed Online through 1/2" Ball Valve under Pressure.




Colour graphic display for online values and sensor setting

Technical Data

Measuring Range					
Flow Range	0(0.1) 250 Nm/s				
Accuracy	±(1% reading + 0.3% Full Scale)				
Sample Rate	Sample Rate				
Reference Cond	20°C, 1 bar(a) - ISO 1217 (Programmable)				
Processed Medium (Gas Type)	Compressed Air, Argon (Ar), Carbon Dioxide (CO ₂) Helium (He), Hydrogen (H ₂), Natural Gas (Ng), Nitrogen (N ₂), Nitrous Oxide (N ₂ 0), Oxygen(O ₂) For use in other gases, Specify gas Composition				
Communication Output					
Analog (Standard)	420 mA (Isolated) / Pulse Output				
Digital (Standard)	RS485, MODBUS RTU Protocol				
Wireless	Bluetooth (Standard), Lora (Option)				
Connector	2 x 5 - pin M12, Female				
Power Supply					
Input	18 to 30V / 5W				
Display / Data Logger					
Display	1.5" LCD with Capacitive Touch Panel				
Data Logger	10,000,000 Samples				
Operating Environment					
Op. Temp	-30 +70 °C				
Medium Temp	-40 150 °C				
Op. Pressure	05.0 MPa (>1.6 MPa need Installation Device)				
Others					
Process Conn	G1/2" (ISO 228-1)				

Correct Installation

EMC

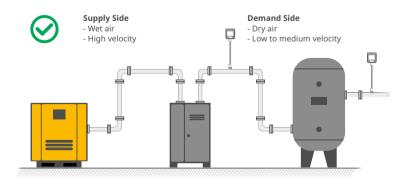

According to IEC 61326-1


Flow Range WAFS - 106

Pipe Size		Flow Range (cfm)			
DN	ID(mm)	Min Flow (cfm)	Std. Range Max Flow (cfm)	High Range Max Flow (cfm)	
20	20	0.06	79	166	
25	25	0.12	124	260	
32	32	0.18	204	425	
40	40	0.29	319	666	
50	50	0.41	499	1040	
65	65	0.71	843	1757	
80	80	1.06	1278	2662	
100	100	1.65	1996	4160	
125	125	2.59	3120	6499	
150	150	3.77	4493	9360	
200	200	6.65	7986	16639	
250	250	10.42	12479	25999	
300	300	14.95	17970	37439	

Applications

- Thermal Mass Flow meters are Widely used in Industrial Processes, Chemical, Petrochemical, Power Engineering, etc.
- Compressed Air Consumption Measurement.
- Determination of Gas Leakage / Leakage Rate.
- Gas Consumption Measurement of a Single Machine / Plant
- Process Gas Measurement, such as Nitrogen, Carbon Dioxide, Oxygen, etc

Correct Installation

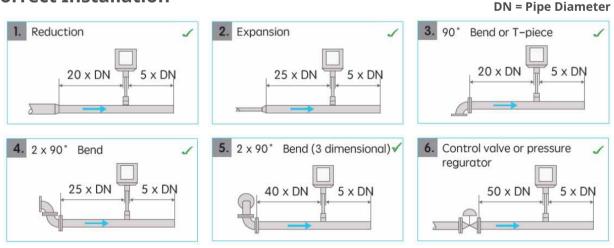

Ordering Codes

• WAFS 106 - A

Thermal Mass Flow Sensor Insertion Type 250mm Shaft, measuring range 0..250 Nm/s, 2.8" display with Capacitive Touch Panel

• WAFS 106 - B

Thermal Mass Flow Sensor Insertion Type 400mm Shaft, measuring range 0..250 Nm/s, 2.8" display with Capacitive Touch Panel

• WAFS 106 - AH

Thermal Mass Flow Sensor, Insertion Type 250mm Shaft with in-Built Data Logger, 2.5 Inch LCD Display, 0.1...250 Nm/s Measuring Range

• WAFS 106 - BH

Thermal Mass Flow Sensor, Insertion Type 400mm Shaft with in-Built Data Logger, 2.5 Inch LCD Display, 0.1...250 Nm/s Measuring Range

Understand Compressed Air System Dynamics with Our Advanced Measurement Solutions

Measure - Manage - Save - Sustain



ASIA REGIONAL OFFICE

WISEAIR TECHNOLOGIES INDIA LLp

CONTACT US

follow us @ wiseair.asia



